


*Precision, 0.1 °C resolution, 0.3 °C accuracy*

*Safety red LED target light*

# FOREHEAD IR THERMOMETER

**Model : TM-966**

*ISO-9001, CE, IEC1010*

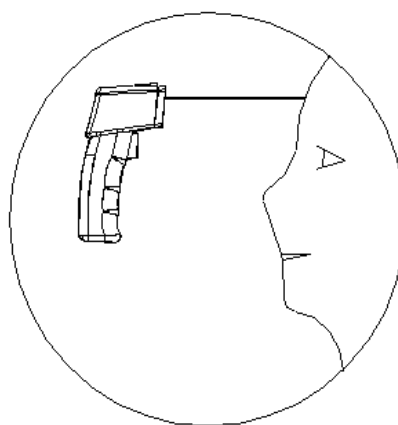

**Lutron**

**LUTRON ELECTRONIC**

***The Art of Measurement***

Precision, 0.1 degree resolution, 0.3 °C accuracy

# FOREHEAD IR THERMOMETER

Model : TM-966

## FEATURES

* Non-contact temperature measurement, 32.0 °C to 42.0 °C ( 89.6 °F to 107.6 °F ) precision for forehead no contact temperature measurement.
* 0.1 degree resolution, high precision, exclusive design for the human forehead temperature measurement.
* Useful instrument to find the not normal ( extra higher ) human body temperature in the crowd quickly.
* Automatic data hold.
* Back light LCD display.
* High repeatability with 0.3 °C .
* °C, °F, display unit, select by internal switch..
* IR measurement with red LED light guide, safety.
* Microprocessor circuit.
* Gun type, heavy duty & compact housing case.
* Data hold function to freeze the display reading.
* LCD display, easy readout.
* Operates from 006P DC 9V battery.

## GENERAL SPECIFICATIONS

Circuit	Custom one-chip of micro processor LSI circuit.
Display	LCD, 29 mm x 33 mm.
Functions	°C, °F, Auto data hold, Auto power off, Auto LCD back light,
Sampling Time	Approx. 0.6 second.
Hold and Auto Power Off function	After release the operation switch, display will hold the last measuring value for 10 seconds continuously.
Power Supply	006P DC 9V battery (Heavy Duty Type, Alkaline type) or equivalent.
Power Consumption	with out LED target light ON : <i>Approx. DC 12 mA.</i> with LCD backlight ON : <i>Approx. DC 48 mA.</i>

Operating	0 to 50 °C (32 to 122 °F).
Temp. and Humidity	Less than 80% RH.
Weight	140 g/0.3 LB ( without battery ).
Dimension	160 x 92 x 45 mm. ( 6.3 x 3.6 x 1.8 inch ).
Standard	Operational manual..... 1 PC.
Accessory Included	Instruction manual..... 1 PC.
Optional Carrying Case	Hard carrying case, CA-05A.

## ELECTRICAL SPECIFICATIONS

Measuring range	Forehead temperature measurement : 32.0 °C to 42.0 °C ( 89.6 °F to 107.6 °F ). Other application range : 0 °C to 110.0 °C ( 32.0 °F to 230.0 °F ).
Resolution	0.1 °C ( 0.1 °F ).
Repeatability	± 0.3 °C <i>* Under measuring range : 32.0 to 42.0 °C.</i> <i>* Within 23 ± 5 °C ambient operating</i> <i>* Two measuring data that test between 1 minute.</i> <i>* Spec. testing under distance is 3 cm.</i>
Accuracy	± 0.3 °C <i>* Under measuring range : 32.0 to 42.0 °C.</i> <i>* Within 23 ± 5 °C ambient operating</i> <i>* Spec. testing under distance is 3 cm.</i>
Measuring distance	3 to 5 cm.
IR Sensor	Thermocouple pie.
Light Guide	Red LED light, safety for human eye.
Emissivity Setting	0.95.
Measurement	6 to 12 micro meter.
Wave Length	
Distance Factor	D/S : Approx. 7:1. D - Distance, S - Spot.

\* Appearance and specifications listed in this brochure are subject to change without notice.

0905-TM966